

Lithium Ion Rechargeable Battery

Technical Information

Revision 0.2
26th August 2013

Model Number	US18650VTC5
Cell Type	Cylindrical
Cell Name	US18650VTC5
Sony Code	49928190

Device Solutions Business Group / Sony Corporation
Sony Energy Devices Corporation

1. General

1.1 Name and Code

- 1.1.1 Model Number : US18650VTC5
- 1.1.2 Cell Name : US18650VTC5
- 1.1.3 Sony Code : 49928190

1.2 Cell Shape and Weight

- 1.2.1 Cell Shape : Cylindrical
- 1.2.2 Size (with plastic tube)
 - : Diameter 18.35mm max
 - : Length 65.20mm max
- 1.2.3 Weight : 44.3g Average

1.3 Safety Regulation

Sony will acquire UL1642.


2. Performance

Nominal Capacity (0.2C discharge)	2600mAh 9.36Wh	average capacity 3.60V (average discharge voltage) at room temperature,2.0V cut off
Rated Capacity (0.2C discharge)	2500mAh 9.00Wh	minimum capacity at room temperature,2.0V cut off
Capacity at 1C	2563mAh 9.23Wh	average capacity at room temperature,2.5V cut off
Capacity at 10A	2577mAh 8.80Wh	average capacity at room temperature,2.5V cut off
Nominal Voltage	3.6V	
Internal Impedance	13.0mΩ Typ.	measured by AC1kHz
Cycle Performance	70% Min. of Initial capacity at 300 cycles	10A discharge at room temperature,2.5V cut off


* Standard Charge Condition

- Charge Method : constant current constant voltage
- Charge Up Voltage : 4.2± 0.05V
- Charge Current : 2.5A
- Charge Time : 2.5h
- Ambient Temperature : 23°C


Charge Characteristics (US18650VTC5)

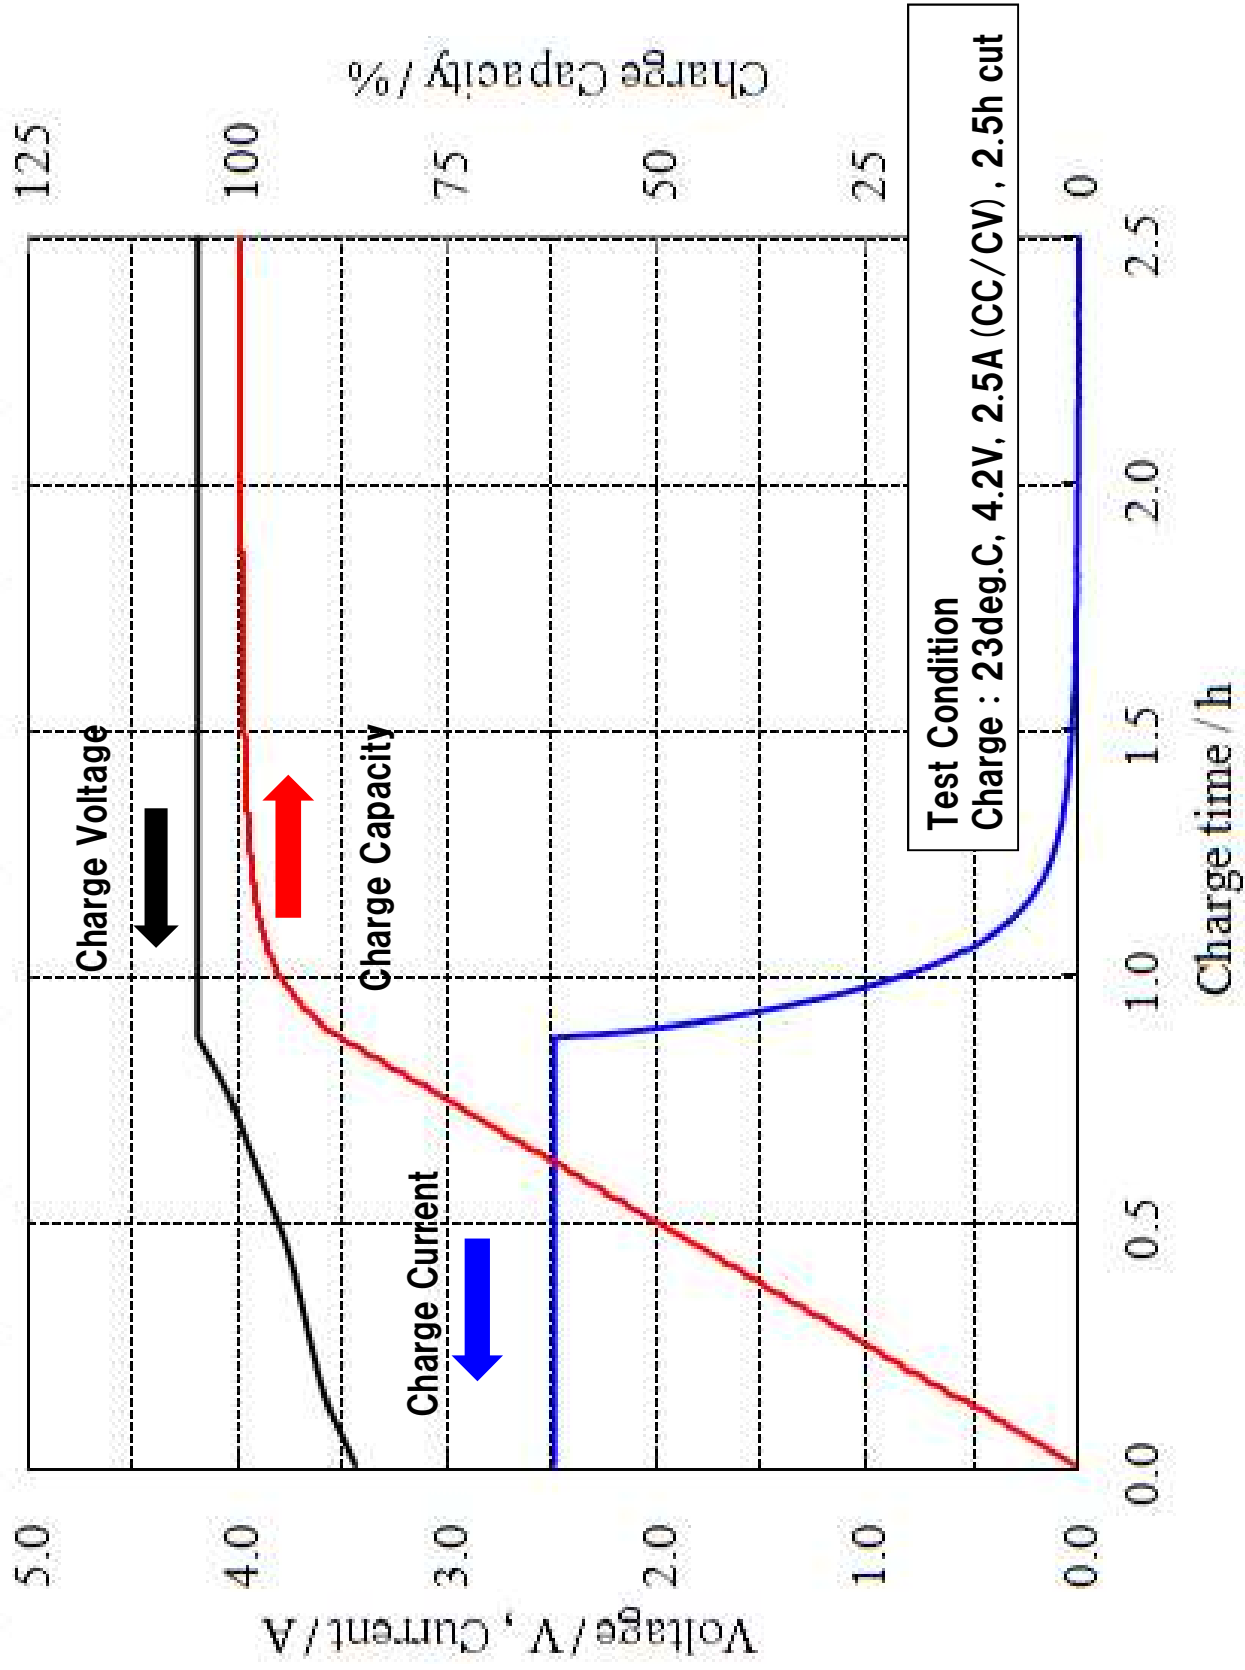


Discharge Load Characteristics (US18650VTC5)

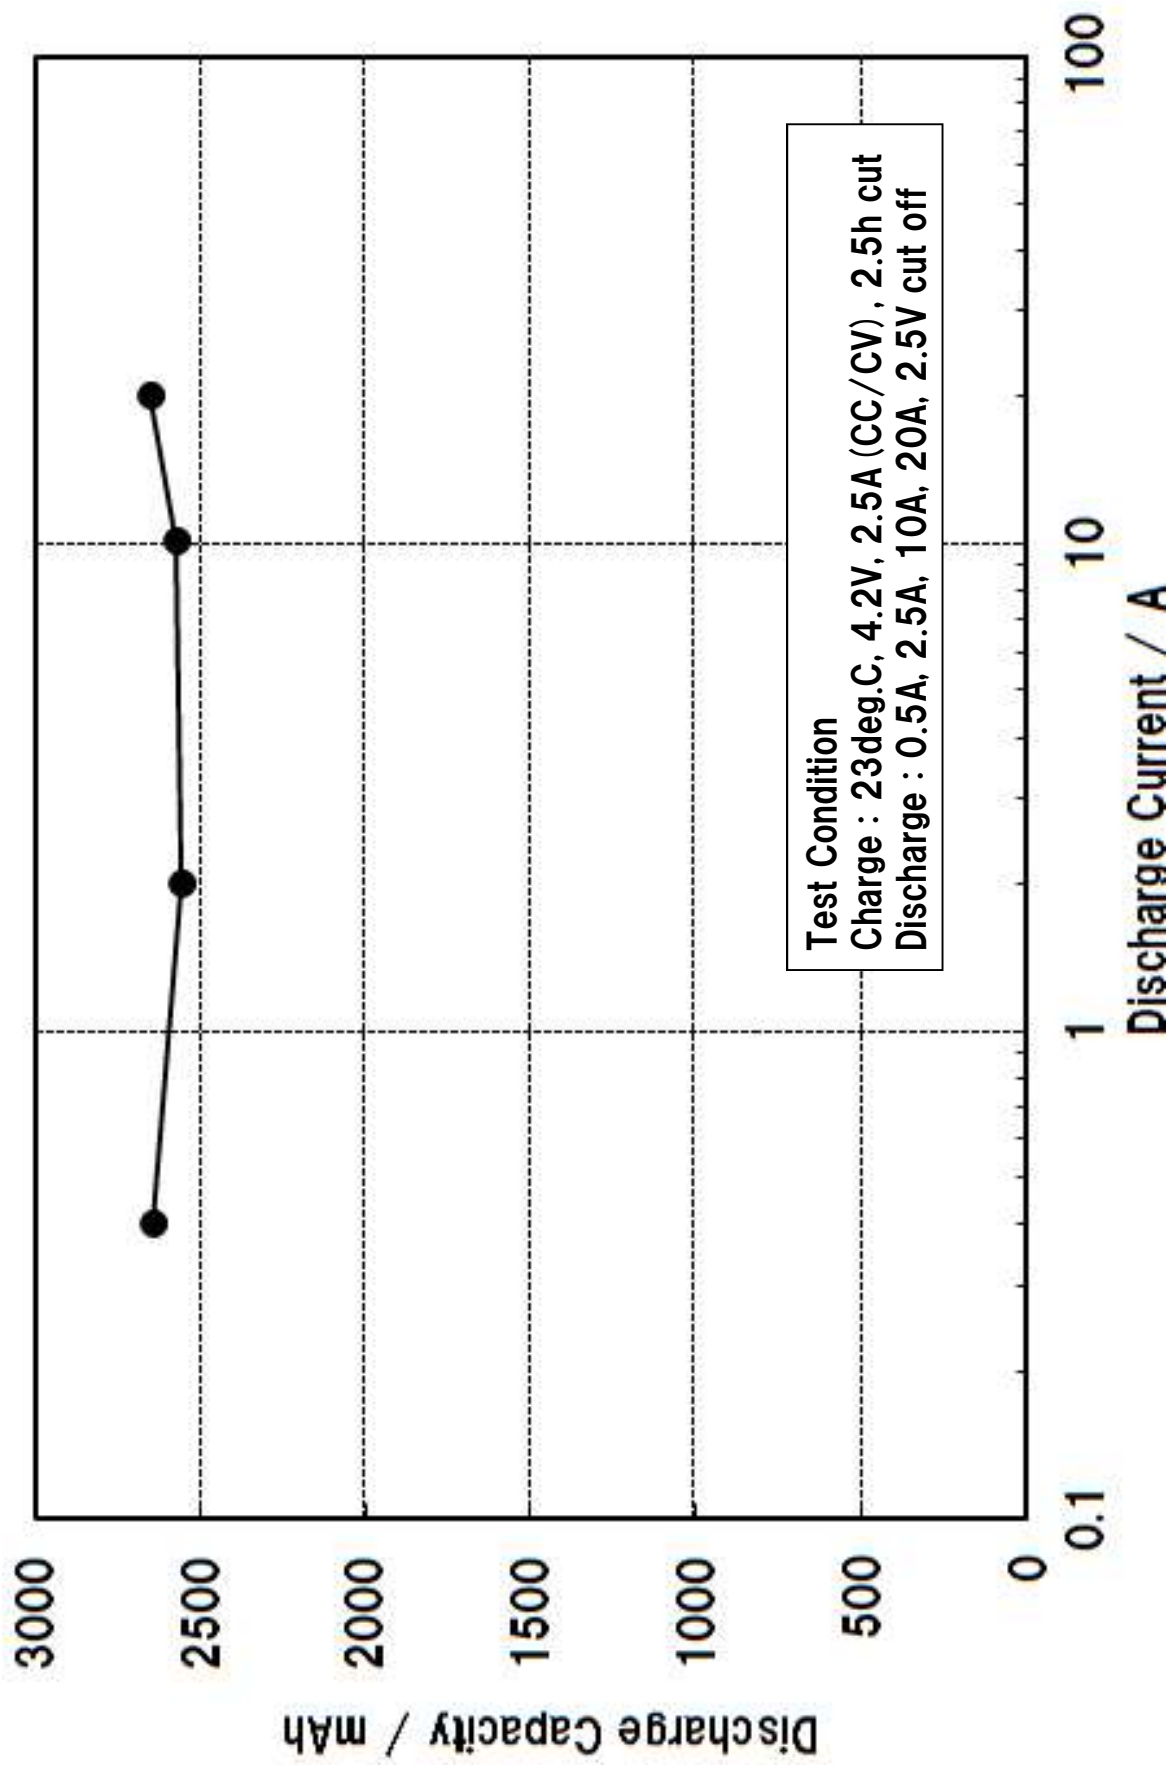


Discharge Load Characteristics (US18650VTC5)

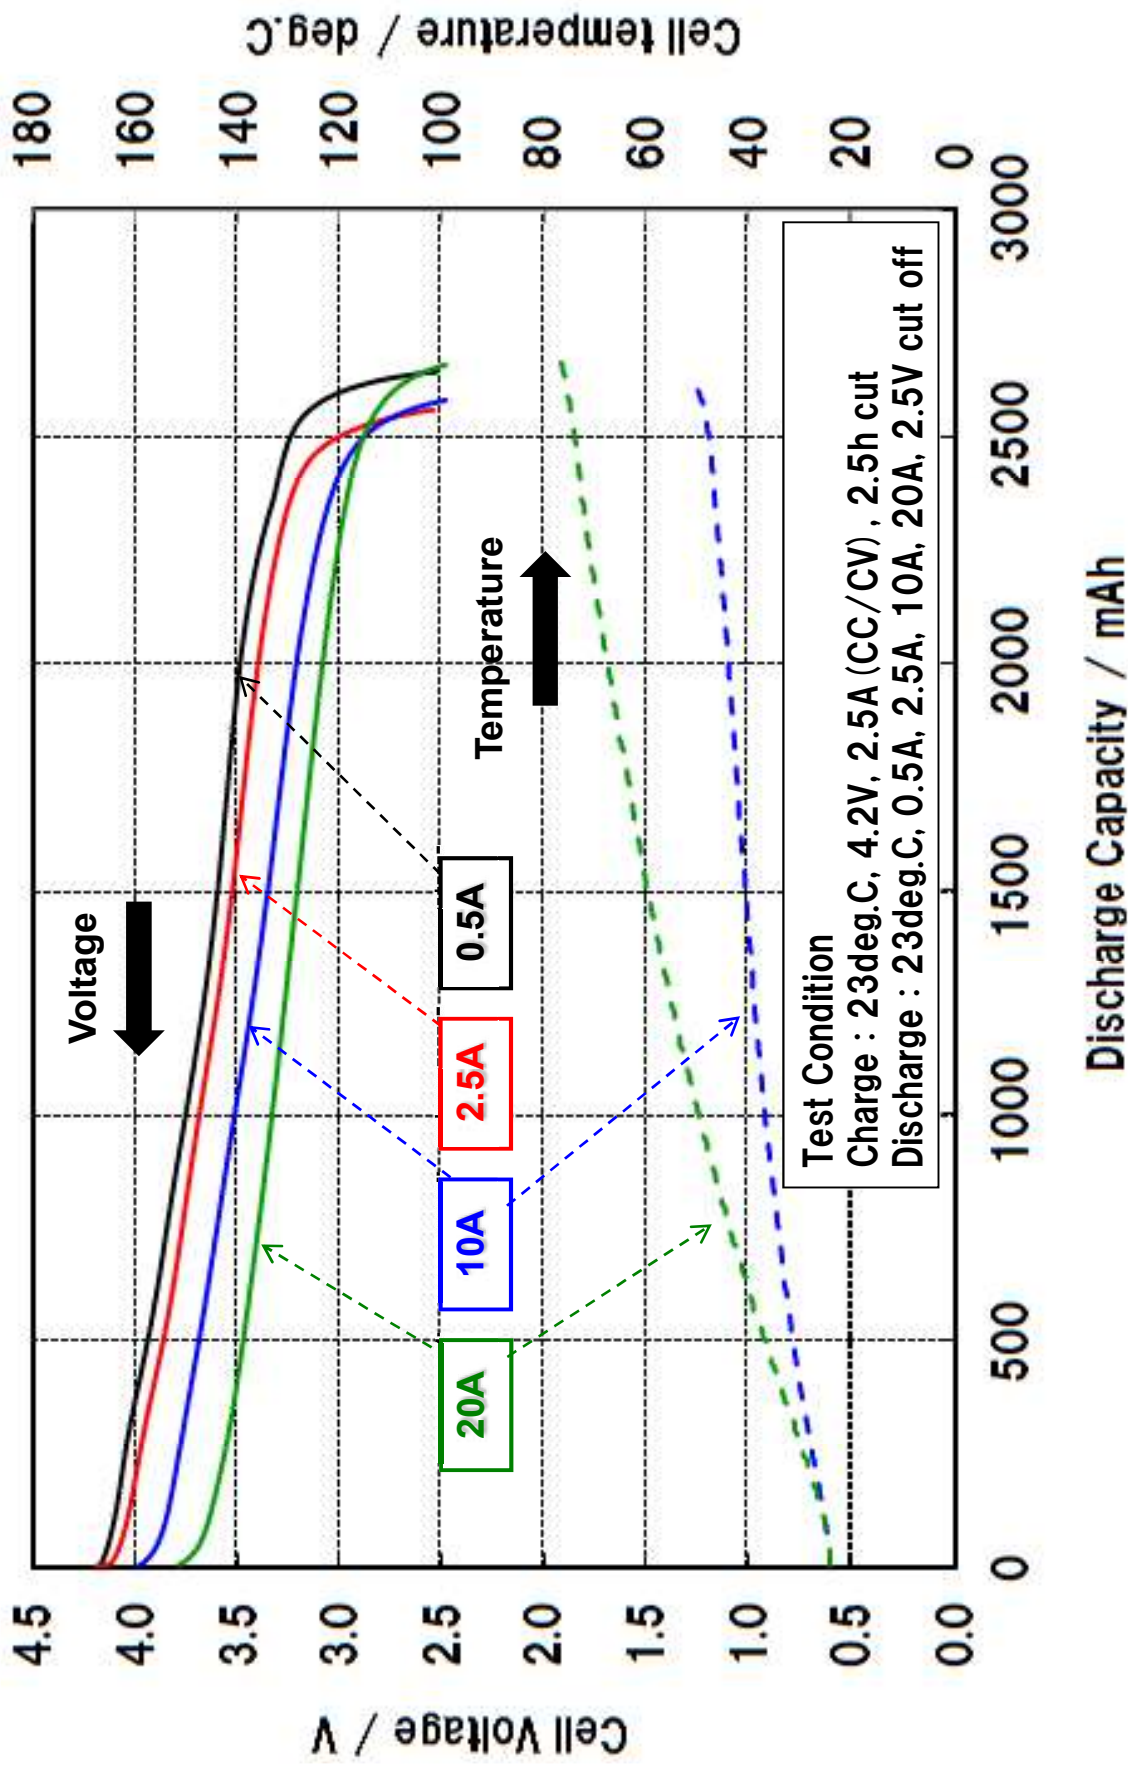


Temperature Dependence of Discharge Capacity (US18650VTC5)

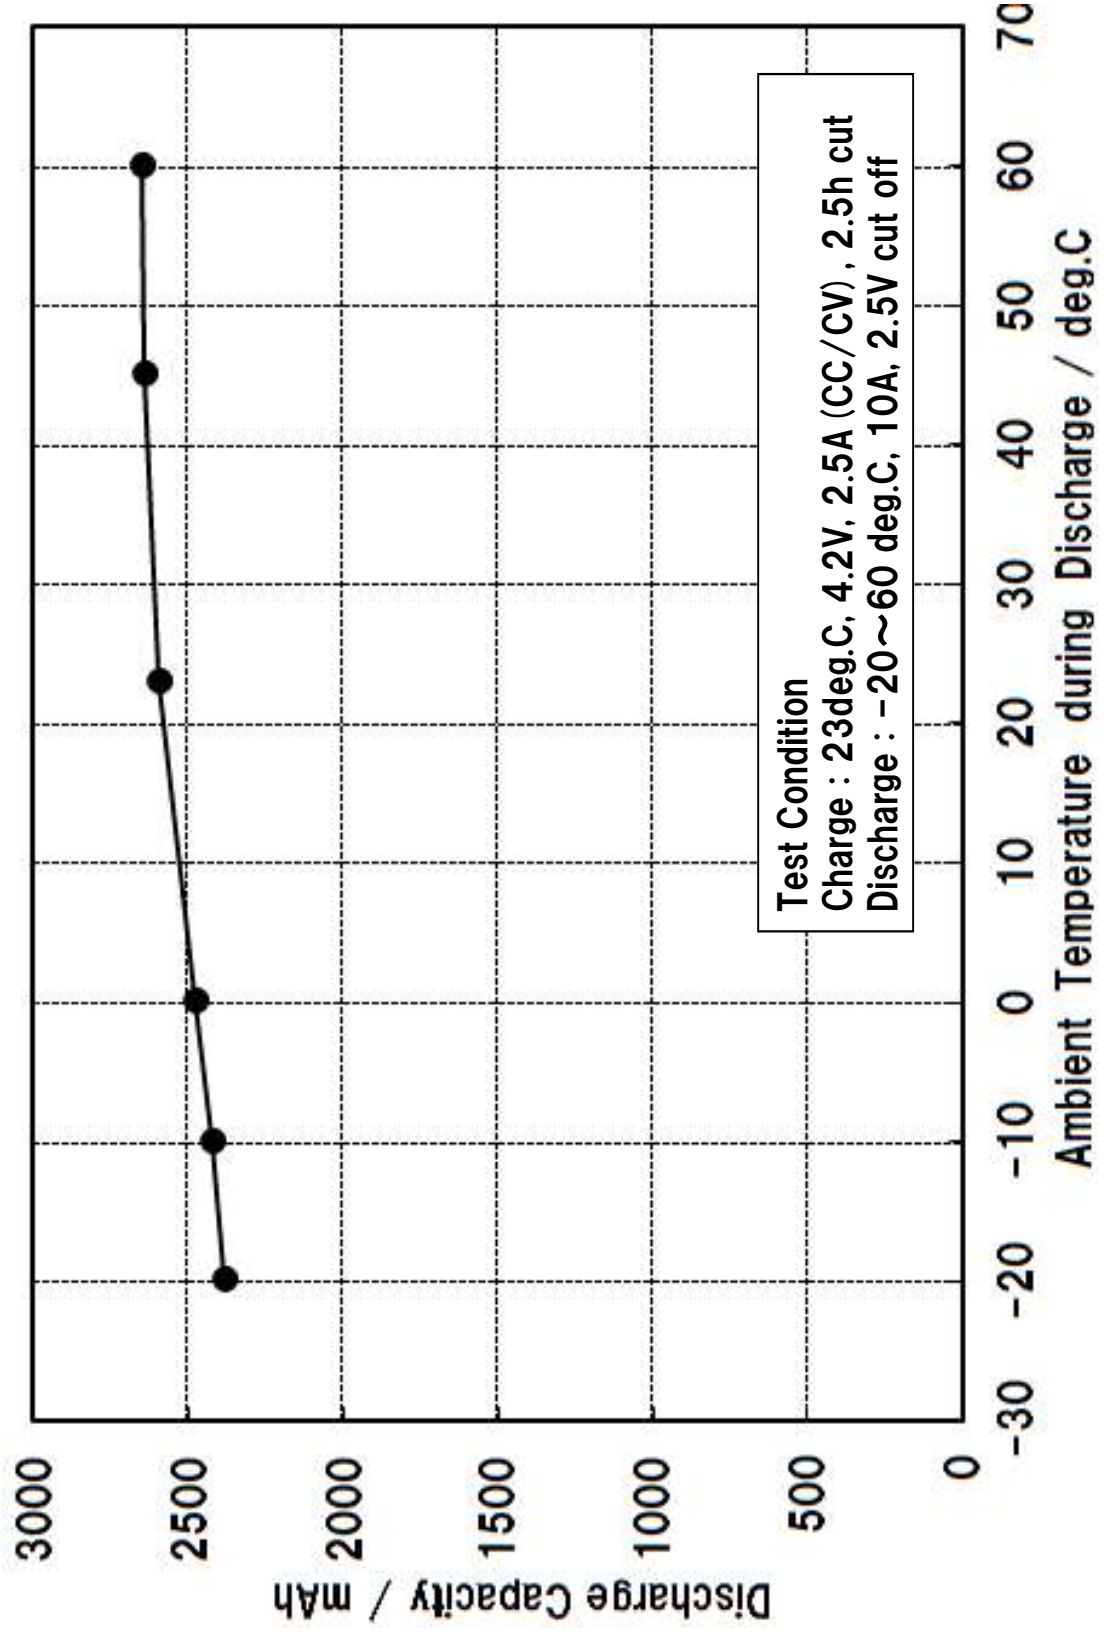

Temperature Dependence of Discharge Curves (US18650VTC5)

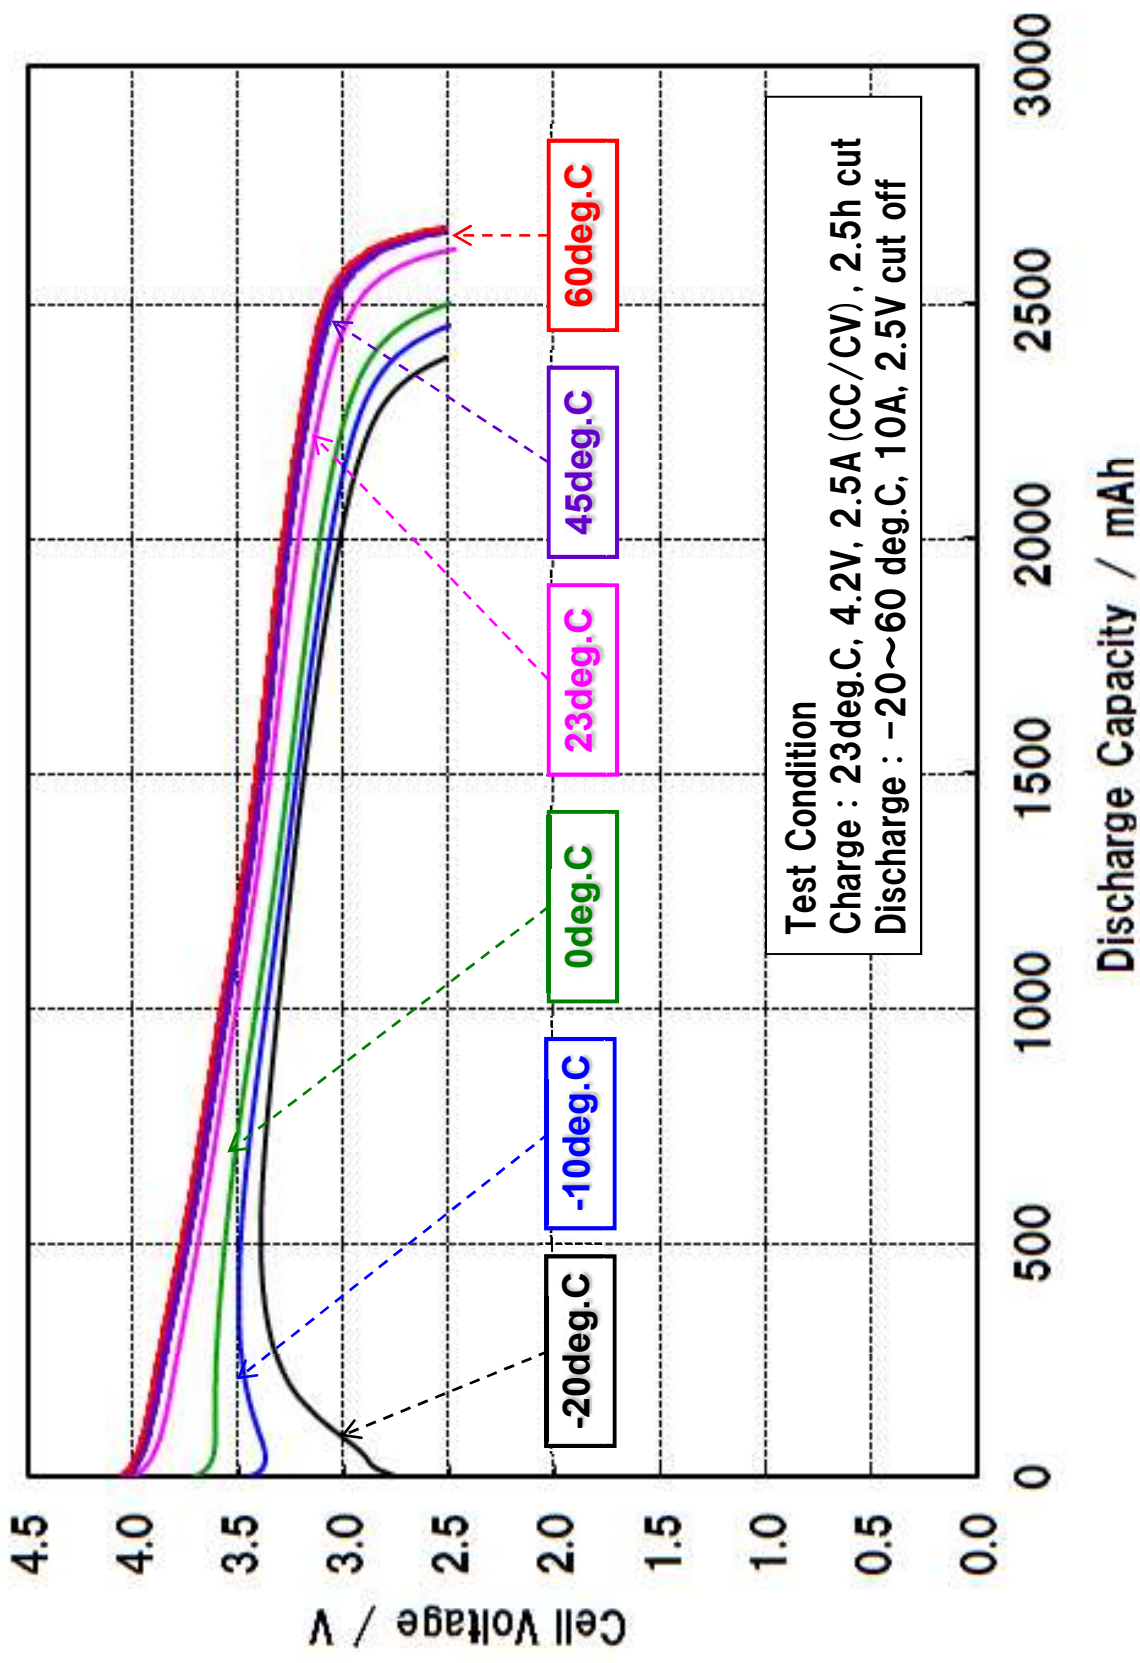

Cycle Life Performance (US18650VTC5) 10A discharge

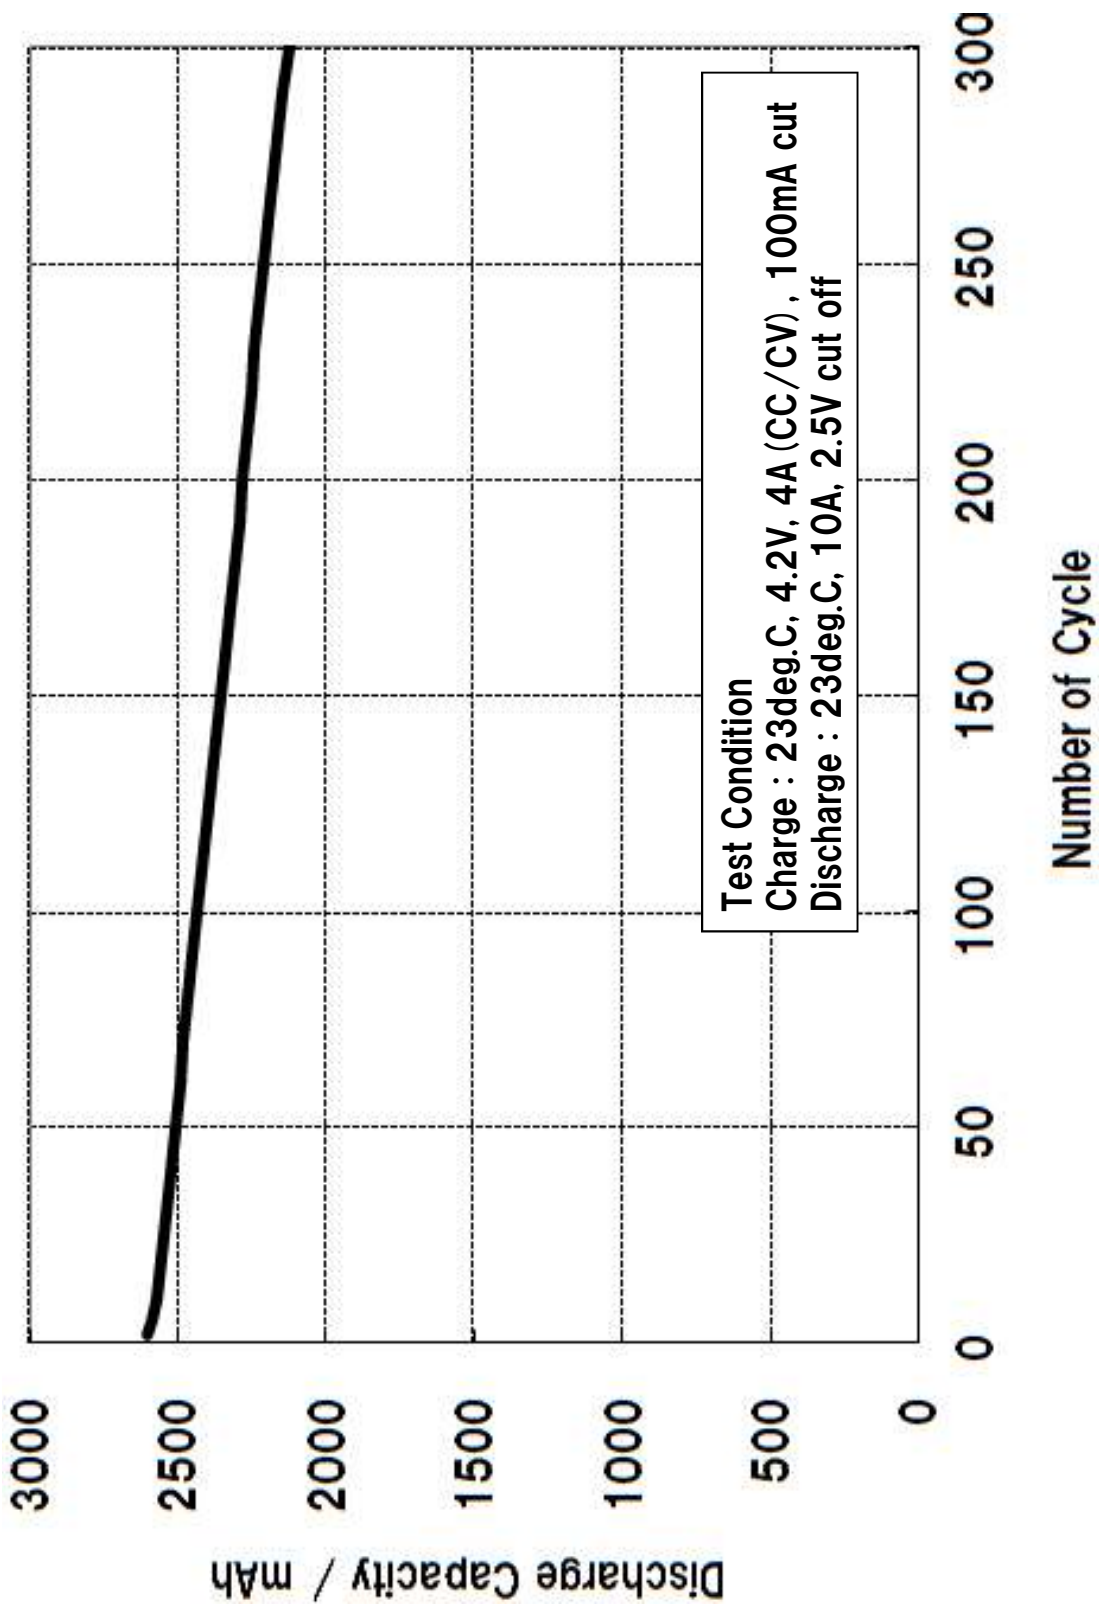

Dimension with Plastic Tube: US18650VTC5

